

HZY12-12 Valve Regulated Lead Acid battery. 12 year design life for stand by power applications.


Innovative Features

Completely maintenance free, sealed construction eliminates the need for watering
 Fully tank formed plates
 Analytical Grade electrolyte
 Spill proof / leak proof
 Valve regulated Max internal pressure 2.5 psi
 Multi-position usage
 ABS Case and cover - V0 on request
 Low self discharge
 FAA and IATA approved as non-hazardous
 Built to comply with IEC 896-2, DIN 43534, BS 6290 Pt4, Eurobat.



Specifications

Nominal Voltage	12 Volts
Nominal Capacity	12.0 Ah 1.75 Vpc
Design Life	12 Years
Operating Temperature	-20 °C to 50 °C
Grid alloy	Calcium / Tin lead alloy
Plates	Flat Pasted
Separator	Microporous polymer
Active material	Very high purity lead
Case and cover	ABS (VO on request)
Charge Voltage	Float 2.25 - 2.30 VPC @25 °C Cycling 2.35 @25 °C Max. 2.4 VPC Max ripple 0.05C (A)
Electrolyte	Gelled Sulphuric acid Analytical grade purity
Venting Valve	EPDM Rubber 1.5 to 2 psi (10.5 - 14 KPa) release pressure. Resealing at 1 psi (7 KPa)
Terminal	Epoxy sealed by extended mechanical paths



Haze Battery Company keenly encourages environmental awareness; PLEASE follow guidelines for the recycling /disposal of lead.

Via Armaroli, 10/12 • 40012 Calderara di Reno (Bo)

Tel. +39 051.722502 • Fax +39 051.720112

infoaccu@accu-italia.com • www.accu-italia.com

Sealed Lead Acid 12 Volt Bloc **GEL Range**
PRODUCT SHEET HZY12-12


12V
Gel

Specifications

Nominal Voltage		12 V	
Nominal Capacity		12.0 Ah	
Dimensions	Total Height	96 mm	3.80 inches
	(Inc. terminals)	104 mm	4.10 inches
	Length	151 mm	5.94 inches
	Width	97 mm	3.82 inches
	Weight	3.7 Kg	8.20 lbs

Characteristics

Capacity 20 °C (68 °F) to 1.75 volts	20 hour rate	12.0 Ah
	10 hour rate	10.4 Ah
	5 hour rate	9.30 Ah
	1 hour rate	6.94 Ah
	15 min rate	5.67 Ah
	Internal Resistance	20 mOhms
Capacity correction for Temperature Variations (C20)	Impedance	S
	40 °C (104 °F)	102%
	20 °C (68 °F)	100%
	0 °C (32 °F)	85%
Self-Discharge 20 °C (68 °F)	-15 °C (5 °F)	65%
	Capacity after 1 months storage	98%
	Capacity after 3 months storage	94%
Short Circuit Current 20 °C (68 °F)	Capacity after 6 months storage	86%
	500	
Terminal	Standard	Faston T2 6.3mm 0.25 inches
	Optional	Faston T1 4.8mm 0.20 inches
Charging (Constant Voltage)	Cyclic	2.35 - 2.40 VPC (20-25 °C)
	Float	2.27 - 2.30 VPC (15-25 °C)

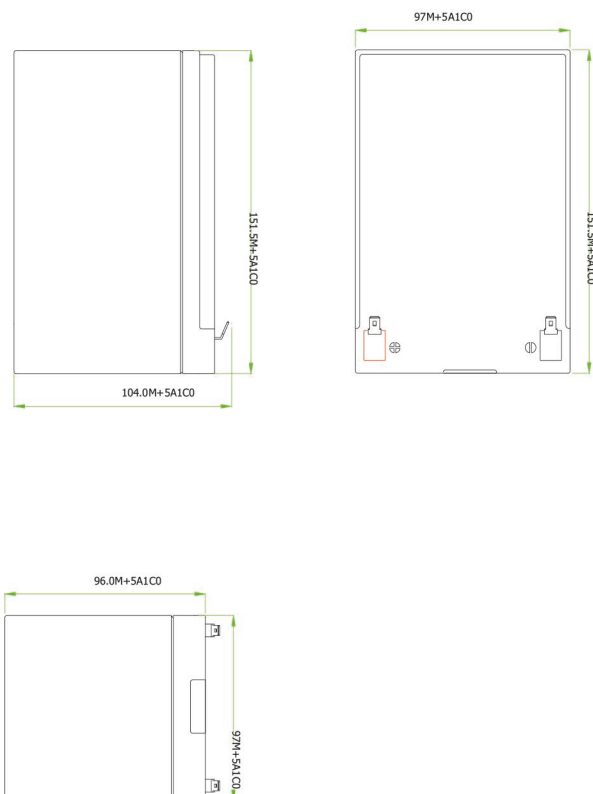

Constant Power Discharge - Watts per Cell @20 °C

End V per Cell	5M	10M	15M	20M	25M	30M	35M	40M	45M	60M	90M	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	12 hr	20 hr
1.85	46.5	35.0	29.3	25.7	22.7	20.3	18.5	16.9	15.7	12.9	9.68	7.81	5.62	4.38	-	-	-	-	-
1.80	53.7	37.7	30.8	26.9	23.6	21.2	19.3	17.6	16.3	13.4	10.0	8.07	5.78	4.52	-	-	-	-	-
1.75	57.3	40.0	32.4	27.8	24.4	21.7	19.7	18.0	16.6	13.7	10.2	8.20	5.87	4.60	-	-	-	-	-
1.70	60.9	41.5	33.7	28.6	24.7	22.1	20.0	18.3	16.9	13.8	10.3	8.28	5.96	4.68	-	-	-	-	-
1.65	63.2	42.7	34.3	29.0	25.0	22.3	20.2	18.4	17.0	13.9	10.4	8.35	6.00	4.71	-	-	-	-	-
1.60	66.4	43.6	35.0	29.3	25.3	22.5	20.3	18.6	17.2	14.0	10.5	8.42	6.03	4.74	-	-	-	-	-

Constant Amps Discharge - Amps @20 °C

End V per Cell	5M	10M	15M	20M	25M	30M	35M	40M	45M	60M	90M	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	12 hr	20 hr
1.85	25.0	18.7	15.7	13.4	11.9	10.6	9.57	8.75	8.03	6.47	4.75	3.78	2.69	2.11	1.75	1.18	0.98	0.84	0.55
1.80	29.3	20.6	16.8	14.3	12.6	11.1	10.0	9.17	8.44	6.77	4.95	3.93	2.80	2.20	1.81	1.22	1.02	0.87	0.57
1.75	31.6	22.1	17.7	15.0	13.0	11.5	10.4	9.44	8.67	6.94	5.08	4.01	2.87	2.25	1.86	1.25	1.04	0.90	0.60
1.70	33.9	23.4	18.6	15.5	13.4	11.8	10.6	9.60	8.80	7.05	5.14	4.06	2.90	2.27	1.88	1.27	1.06	0.92	0.61
1.65	35.1	24.5	19.0	15.9	13.7	12.0	10.8	9.72	8.91	7.15	5.19	4.10	2.93	2.30	-	-	-	-	-
1.60	37.3	25.3	19.6	16.3	13.9	12.2	10.9	9.86	9.01	7.21	5.24	4.13	2.96	2.31	-	-	-	-	-

ACCU ITALIA® spa

ACCUMULATORI

Via Armaroli, 10/12 • 40012 Calderara di Reno (Bo)

Tel. +39 051.722502 • Fax +39 051.720112

infoaccu@accu-italia.com • www.accu-italia.com



**UL Recognised
Component
MH28512**